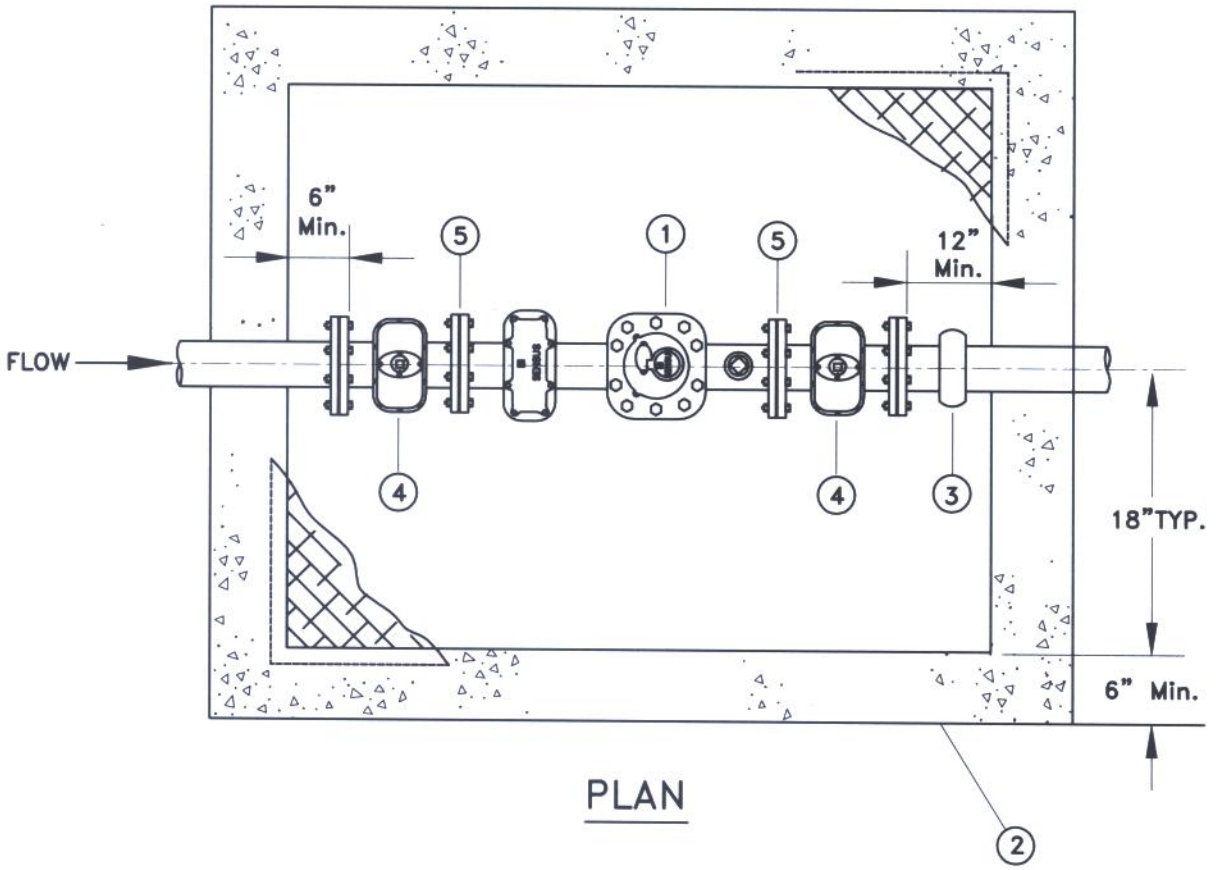

PLAN

(1) SENSUS SERIES "W" TURBO METER WITH BUILT IN STRAINER & TEST OUTLET APPROXIMATELY 23" LONG.

(2) VAULT FRAME AND COVER PER STD. DWG W-19, AND W-20.

(3) VICTAULIC COUPLING.

(4) GATE VALVE, FLANGE X FLANGE WITH 2" OPERATING NUT.

(5) SUPPORT METER WITH VALVE SUPPORTS PER W-18.

NOTES: VAULT DEPTH NOT TO EXCEED 5'-0" FROM TOP OF VAULT TO FLOOR.
SERVICES 6" AND LARGER REQUIRE SPECIAL DESIGN.

Revision	By	Approved	Date
04/26/01	kal		
06/07/01	DW		
10/16/02	DW		

CITY OF OCEANSIDE

3" & 4" TURBO-METER FOR IRRIGATION SERVICE

M. Dorge

CITY ENGINEER 8/8/02 Date

STANDARD DRAWING NO. W-11