


REDUCED PRESSURE PRINCIPLE ASSEMBLY

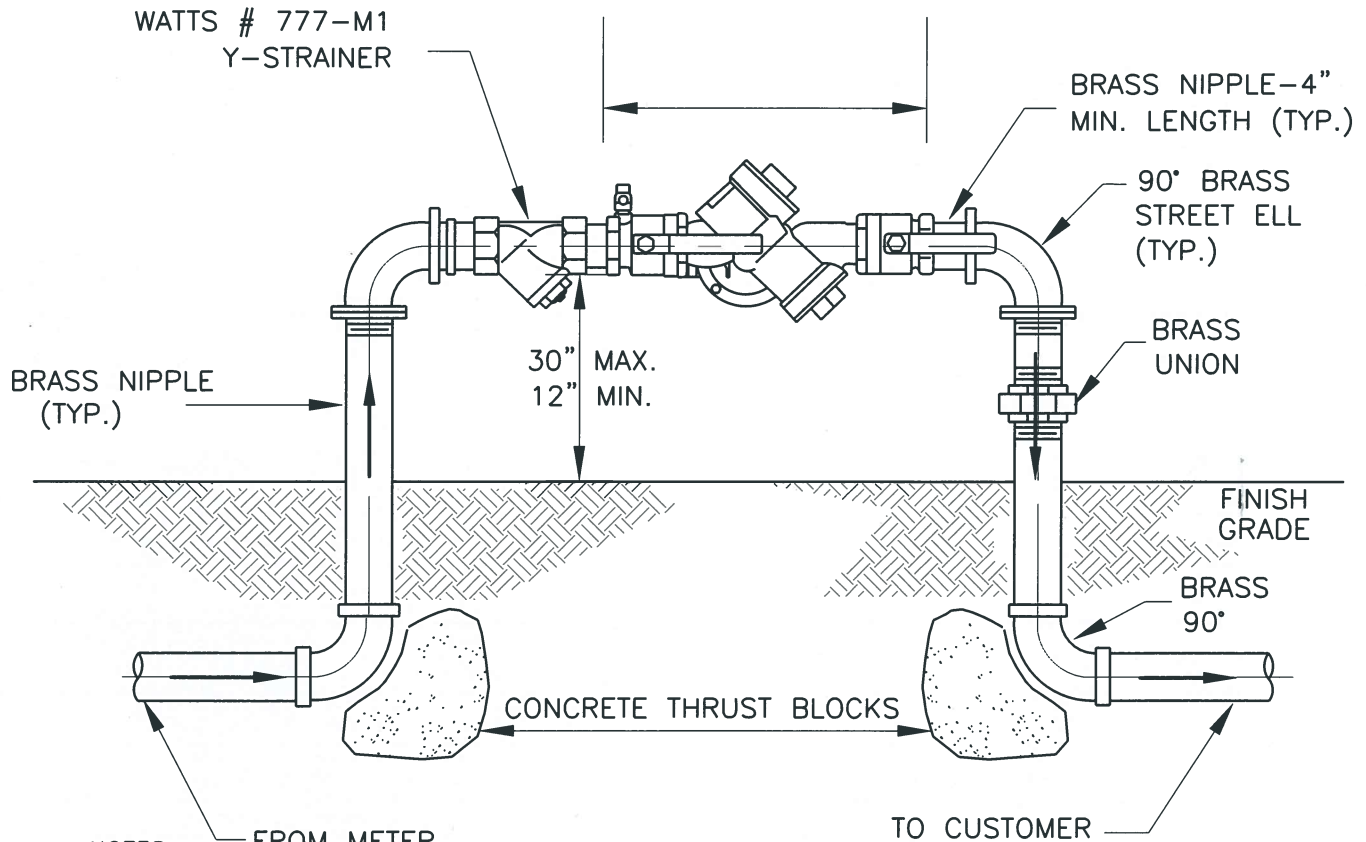

NOTES:

1. ASSEMBLY TO BE APPROVED BY THE DEPT. OF HEALTH SERVICES, OFFICE OF DRINKING WATER.
2. ASSEMBLY SHALL BE INSTALLED IMMEDIATELY DOWNSTREAM OF THE METER WITHIN 18".
3. NO CONNECTION BETWEEN THE METER AND ASSEMBLY IS PERMITTED.
4. RED BRASS FROM METER THROUGH RP DEVICE
5. ALL BURIED BRASS TO BE WRAPPED IN 6 MIL POLYETHYLENE.
6. PAINT ALL ABOVE GROUND PIPEING OSHA 300 - PURPLE.
7. WARNING TAGS CHRISTY'S MODEL 10-MAX-P2-RCIP2.

THIS ASSEMBLY SHALL BE INSPECTED BY THE WATER UTILITIES DEPARTMENT. AFTER WATER UTILITIES DEPARTMENT'S APPROVAL ASSEMBLY SHALL BE TESTED BY A CITY APPROVED TESTER. THE DEVELOPER/OWNER IS RESPONSIBLE FOR THE COST OF TESTING THE ASSEMBLY. THERE AFTER, THE ASSEMBLY SHALL BE TESTED ANNUALLY AT THE OWNER'S EXPENSE. THE TEST REPORT IS TO BE SUBMITTED TO THE CITY WATER UTILITIES DEPARTMENT. PHONE # 760-435-5864

Revision	By	Approved	Date	CITY OF OCEANSIDE	
04/03/01	kal			REDUCED PRESSURE PRINCIPLE ASSEMBLY (2" & SMALLER)	<i>Scott D. Smith</i> 12-1-10 CITY ENGINEER Date STANDARD DRAWING NO. RW-7
08/30/04	AC				
06/04/07	AC				
09/23/10	DW				