
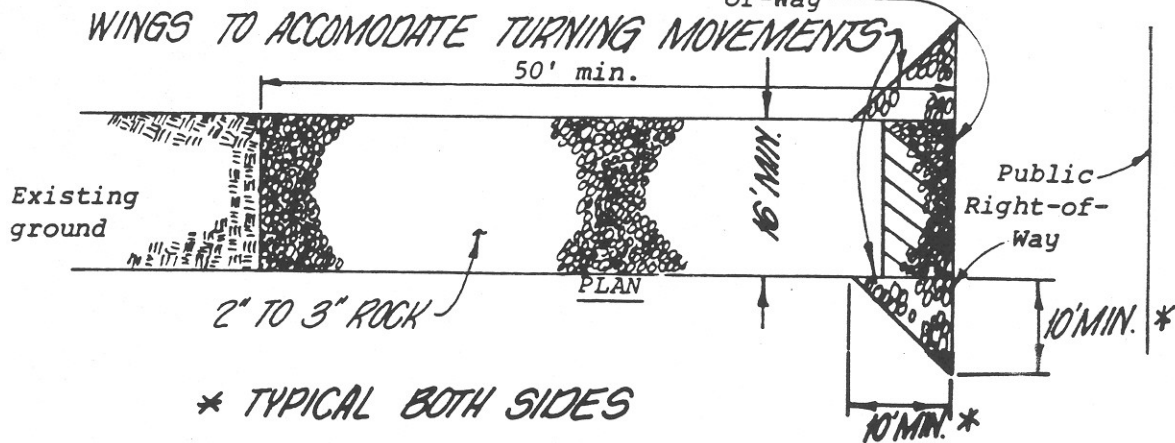


*DRAINAGE PROVISIONS TO BE DETERMINED
ON CASE BY CASE BASIS*

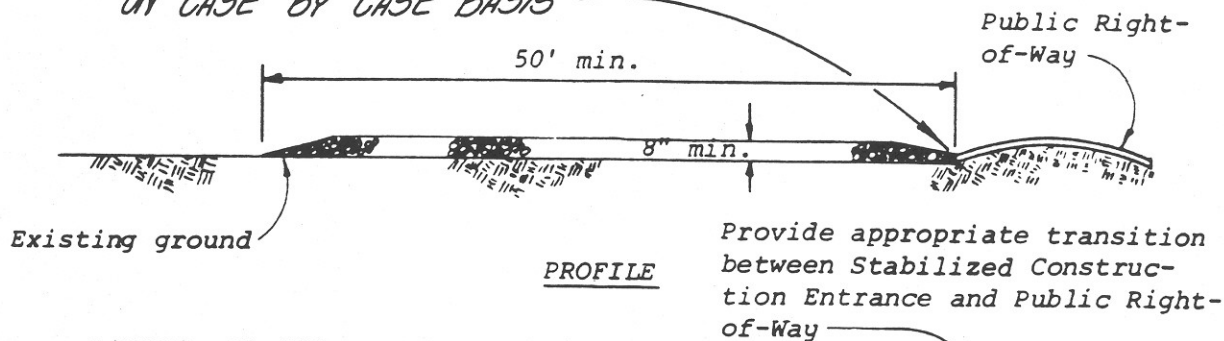

** TYPICAL BOTH SIDES*

GENERAL NOTES FOR STABILIZED CONSTRUCTION ENTRANCE

1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND, AND REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, DROPPED, WASHED OR TRACKED ONTO PUBLIC RIGHTS-OF-WAY SHALL BE REMOVED IMMEDIATELY.
2. WHEN NECESSARY, WHEELS SHALL BE CLEANED TO REMOVE SEDIMENT PRIOR TO ENTRANCE ONTO PUBLIC RIGHTS-OF-WAY. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN. ALL SEDIMENT SHALL BE PREVENTED FROM ENTERING ANY STORM DRAIN, DITCH OR WATERCOURSE THROUGH USE OF SAND BAGS, GRAVEL, BOARDS OR OTHER APPROVED METHODS.

A STABILIZED PAD OF CRUSHED STONE SHALL BE LOCATED AT ANY POINT WHERE TRAFFIC ENTERS OR LEAVES A CONSTRUCTION SITE AT A PUBLIC RIGHT-OF-WAY, STREET, ALLEY, SIDEWALK OR PARKING AREA.

Revision	By	Approved	Date

CITY OF OCEANSIDE

*STABILIZED
CONSTRUCTION ENTRANCE*

Ronald A. Bech
CITY ENGINEER 12/2/92 Date

**STANDARD
DRAWING NO. M-26**