


METER BOX & METERS INSTALLED BY CITY FORCES AT CONTRACTORS EXPENSE.

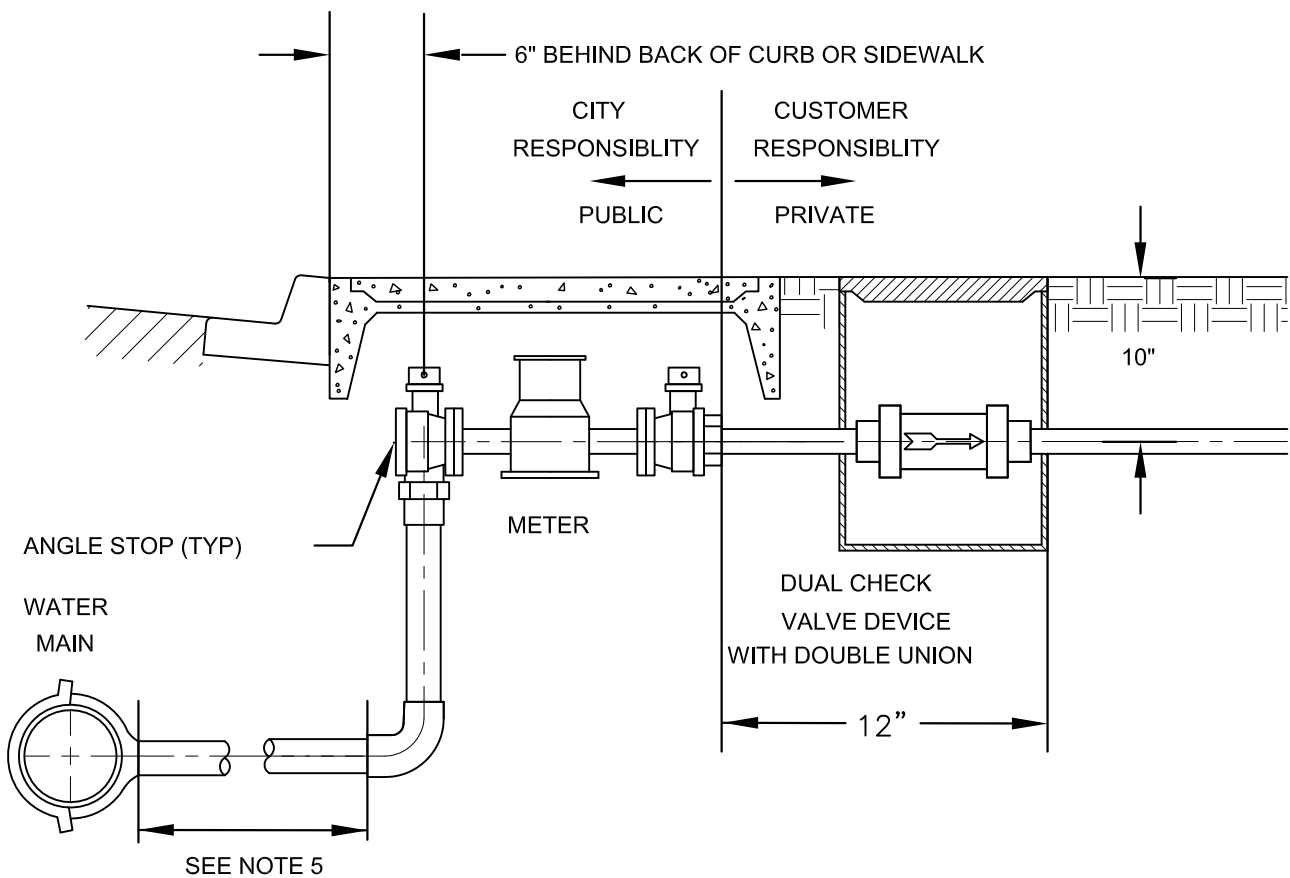

NOTES:

1. DEVICE SHALL BE INSTALLED IMMEDIATELY DOWNSTREAM OF THE METER WITHIN 12".
2. NO CONNECTION BETWEEN THE METER AND ASSEMBLY IS PERMITTED.
3. BRASS FROM METER THROUGH DUAL CHECK VALVE ASSEMBLY.
4. BURIED COPPER TYPE "K" TO BE WRAPPED IN 6 MIL POLYETHYLENE PER SECTION 2.12.
5. NO COUPLINGS ALLOWED FOR WATER SERVICES LESS THAN 1-1/2".

Revision	By	Approved	Date
03/27/12	DW		
01/04/16	MU		
07/01/17	SM		08/01/17

CITY OF OCEANSIDE

RESIDENTIAL FIRE SPRINKLER

DUAL CHECK VALVE DEVICE

Steven E. Strapac 9/17/17
CITY ENGINEER Date

STANDARD DRAWING NO. **W-30**